

Reader Identification

	Reader Model	Wiring Connection	Body Color	Trim Color		Credential Profile		Configuration Option
Example	20	T	K	S	-	00	-	000000

Reader Model:




Wiring Connection:

T= Terminal / N = Pigtail



Body Color:

K = Black / W = White

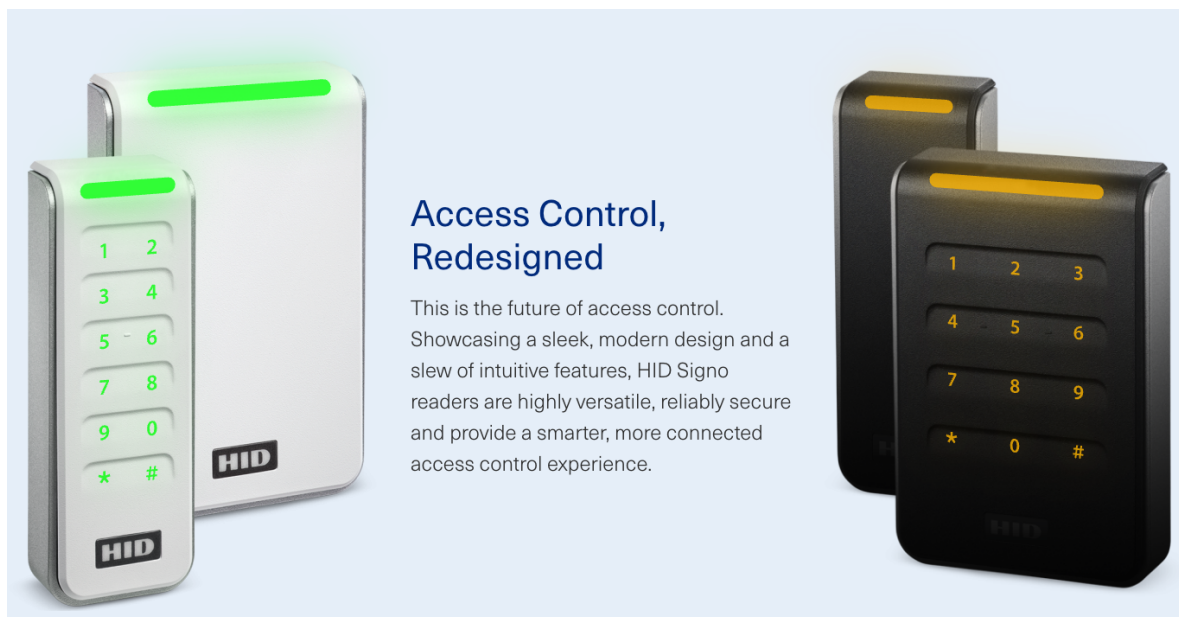

Trim Color:

S = Silver

*A black trim/mounting plate is available as an accessory item at an additional cost.



Credential Profile:

00 = Standard Profile

01 = Seos Profile

02 = Smart Profile

2. Select credential profile (select one option)

		Communication Type	NFC/ BLE	High Frequency											Low Frequency			
		Credentials Technologies Supported	Seos® (Mobile IDs via NFC/BLE)	Seos	iCLASS SE®	iCLASS SR	iCLASS®	MIFARE DESFire EV1 / EV2/EV3 (SIO)	MIFARE Classic (SIO)	MIFARE DESFire EV1 / EV2/EV3 (CSN)	MIFARE Classic (CSN)	MIFARE DESFire EV1 / EV2/EV3 (Custom Data)	MIFARE Classic (Custom Data)	FeliCa IDm	CEPAS (CAN or UID)	125kHz HID Proximity®	125kHz Indala Proximity	125kHz EM4102 Proximity
Regular Options	☐ 00 - Standard Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ 01 - Seos Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ 02 - Smart Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ 03 - Custom Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Priority Options ³	☐ T0 - Priority Standard Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ T1 - Priority Seos Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ T2 - Priority Smart Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	☐ T3 - Priority Custom Profile		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• Supported

– Not supported

[Readers and Credentials How to Order Guide](#)

Revision #1

Created 2026-02-16 23:18:19 UTC by Ryan Walsh

Updated 2026-02-16 23:29:57 UTC by Ryan Walsh